

OIL Series

© 2007 Nilfisk-CFM S.p.A. A10 I 07 I Dati, Caratteristiche, colori ed illustrazioni sono indicativi e non impegnativi



Nilfisk-CFM S.p.A.
Via Porrettana 1991
41059 Zocca (Modena) Italy
Tel. +39 059 9730000
Fax +39 059 9730099

www.nilfisk-cfm.it
info@nilfisk-cfm.it

☐ please call me by phone
☐ I need a visit of a vacuum specialist
☐ please send me free documentation

on model _____

Company: _____ Mrs/Mr. _____

Function: _____ Address: _____

Zip: _____ City _____ Prov./State: _____

Tel.: _____ Fax: _____ Mobile: _____

E-mail: _____

OIL Series





The most performant tool to save oil and time, the OIL Series



ECO-OIL 13 e ECO-OIL 22



OIL 440E e OIL 675E



A fast recovery of oil and swarfs with model OIL 440E

Nilfisk-CFM produces a range of vacuums specifically designed to recover oil, viscose liquids and swarf, capable of separating the solids from the liquids by means of “macro-filtration”.

This operation allows the operator to recycle the recovered oil.

The OIL models are ideal to empty sumps with simple and time-saving operation.

For instance, “to empty a 1.000 litres tank two people require approximately 4-6 hours; with a Nilfisk-CFM Oil model the same two people only need one hour to perform the job; with significantly improved quality.”

How do OIL models operate?

Oil, liquids and swarf collection is achieved using an oil resistant rubber hose. The liquid part is seperated from the swarf - which is trapped in the swarf container - and sucked into the tank; inside the tank there is an automatic level control which cuts off the power when the tank is full.

At this point the liquid can be pumped back into the machine tool through a pump, while the swarf container ca be emptied manually.

DATA		ECO-OIL 13	ECO-OIL 22	OIL 440	OIL 675
Phase		Singlephase	Threephase	Threephase	Threephase
Power	kW	1,3	2,2	4	7,5
Max depression	daPa	3.200	3.300	4.600	6.500
Max airflow	L/min	2.675	5.100	5.200	7.150
Liquids capacity	L	180	180	400	600
Swarfs capacity	L	30	30	55	55
Dimensions	cm	105x67	105x67	130x70	175x85
High	cm	150	150	180	198
Weight	kg	120	135	330	380
All models are equipped with anti-oil wheels with brakes. All seals are in rubber anti-oil.					

No more waste

= less down time by using a CFM ECO-OIL.

Take now in consideration the machine tools maintenance , by using the ECO-OIL the benefits will be many:

- Saving on coolants/oils as they can be recycled
- Saving on disposal
- Saving on grinding tools
- Saving on buying equipment
- Saving time on cleaning the working environment
- Saving working time – less down time



Collection of large quantities of swarfs




Standard



Optional




Standard

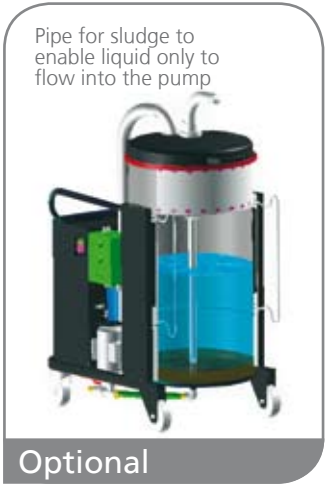

Optional



Standard

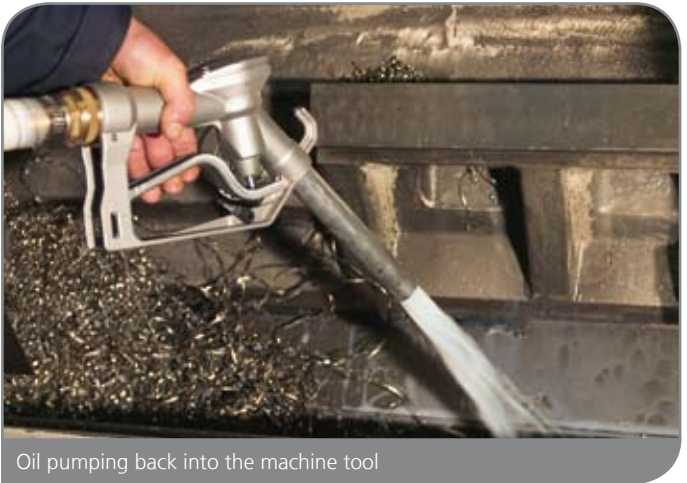

Oil pumping back into the machine tool



Machine tool maintainance in few seconds